

# Model EPT1000 series

OEM Pressure Transmitter  
Stainless steel pressure sensor  
Mass production, automated calibration



## Features

- Measuring ranges from 200mbar to 100bar
- Gauge pressure
- Accuracy:  $\pm 0.5\%$  FSO(Typ.)
- Calibrated and temperature compensated
- Stainless steel pressure sensor
- Output 4...20mA, DC1...5V, DC 0.5...4.5V

## Application

- Hydraulic and pneumatic
- Machine building
- Pumps
- Water treatment
- IoT pressure measurement

## Technical data

### Pressure range

Nominal pressure [bar]	0.2	0.35	0.6	1	1.6	2.5	4	6	10	16	20	25	35	50	70	100
Overpressure [bar]	0.4	0.5	1	1.5	3	5	7	10	15	30	30	40	50	70	100	140

### Performance

Accuracy*	0.5 %FS@25°C	*Linearity (best straight line) + Hysteresis + Repeatability
Operating Temperature	-20 to 85°C	
Compensated Temperature Range	-10 to 70°C	
Vibration	20 g RMS(20 to 2000Hz)	
Shock	100 g(10ms)	
Cycles	$10 \times 10^5$	
Long Term Stability	0.2 %FS	

### Electrical @25°C

Output signal / Supply	2-wire 4...20mA / $V_S = 9... 30VDC$
	3-wire 1...5VDC / $V_S = 9... 30VDC$
	3-wire 0.5...4.5VDC / $V_S = 9... 30VDC$
Insulation Resistance	100 M $\Omega$ @100VDC
EMC Test	IEC61000-6-2/IEC61000-6-3
Reverse polarity protection	No damage – no function


### Physical Specifications

Housing	304 stainless steel
Diaphragm	316L stainless steel
Oil Filling	Silicone oil
Protection	IP65
Weight	~200g

# Model EPT1000 series

OEM Pressure Transmitter  
 Stainless steel pressure sensor  
 Mass production, automated calibration

Dimensions (All dimensions in mm)

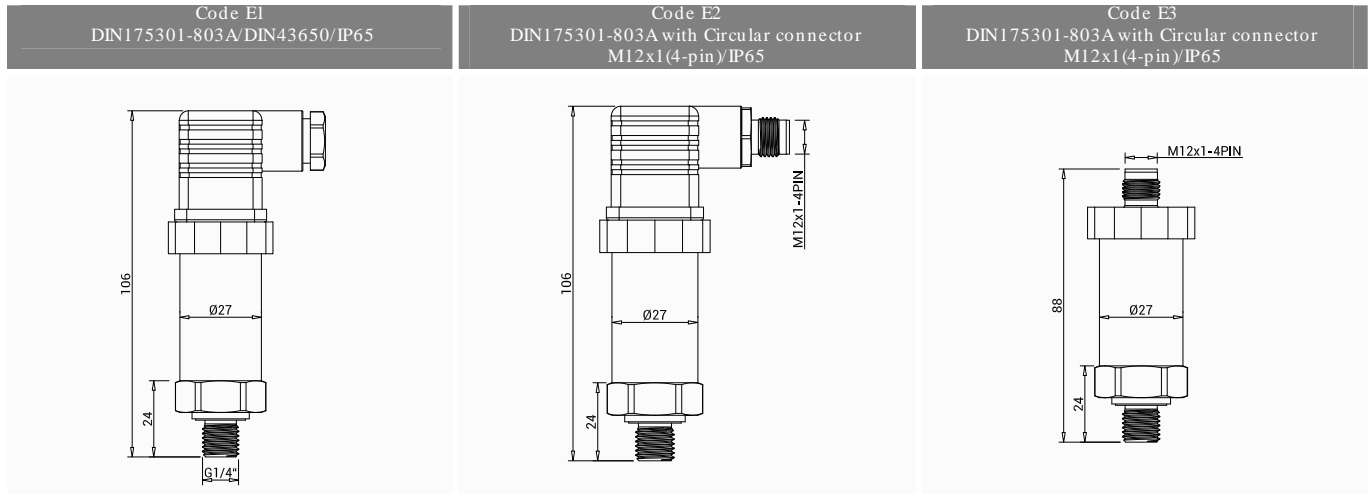

## Electrical connections

DIN175301-803-A	4..20mA 2-wire	1..5VDC 3-wire	0.5..4.5VDC 3-wire	Circular connector M12x1(4-pin)	4..20mA 2-wire	1..5VDC 3-wire	0.5..4.5VDC 3-wire
+Vcc	1	1	1	+Vcc	1	1	1
OUT	2	3	3	OUT	3	4	4
GND	NA	2	2	GND	NA	3	3

## Ordering code

Part Number: EPT1000-02G42G4E1

Model	Range	Type	Output	Pressure Port	Electrical Connection
EPT1000	01 0.2bar	G Gauge	42 4..20mA	G4 G1/4"male	E1 DIN175301-803A
	02 0.35bar		15 DC1..5V	G2 G1/2"male	E2 DIN175301-803A with M12 connector
	03 0.6bar		05 DC0.5..4.5V	M2 M20x1.5male	E2 M12 connector
	04 1bar				
	05 1.6bar				
	06 2.5bar				
	07 4bar				
	08 6bar				
	09 10bar				
	10 16bar				
	11 20bar				
	12 25bar				
	13 35bar				
	14 50bar				
	15 70bar				
	16 100bar				